

LIGHTING SOLUTIONS

ALL AROUND THE WORLD



















CONTENTS





Per the Law of Intellectual Property Rights and related legislative provisions, any article, images, and other visual presentations published in this catalog belong to **Entek LED**None can be excerpted or used without permisson.

Bu katolagda yayımlanan her türlü yazı, resim ve görsellerin tüm hakları FSEK ve ilgili Mevzuat Hükümlerince **Entek LED** firmasına aittir. İzinsiz alınamaz, kullanılamaz.


Copyright © Entek LED Armatür San. ve Tic. A.Ş. www.entekled.com.tr



www.entekled.com.t





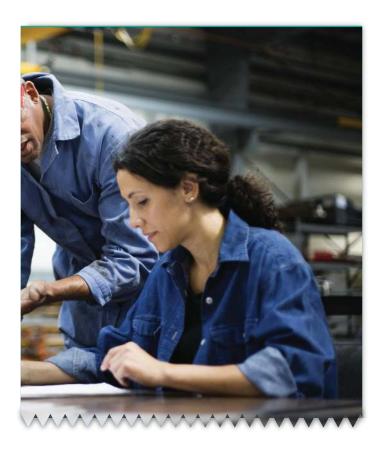











www.entekled.com.tr

Production Process Entek LED

6- Paint Workshop



Electrostatic-lamination painting is carried out. Electrostatic powder paint is a completely dry coating method which does not contain any solvent. Powder paint is applied using special painting pistols in a paint booth.

7- LED Mounting



LED components are mounted on the board through automation. Specially designed electronic circuits and LED components are placed onto the boards which are reinforced with a high density aluminium base.

8- Assembly Lines



Component assembly is performed on our products using special adhesive tapes.

Interconnected workstations in our multi-model assembly lines are used to assemble the components of the product to reach the final product. Different products or other varieties of the same product are mass produced according to the specific priority relations according to required technology and capacity.

9- Quality Control



Products which are ready for packaging are subjected to quality control.

Our lighting products can be easily introduced to any location as a result of the quality control system in place within our factory. As a company we are aware of the direct relationship between the lighting system and the product. Therefore we believe that by keeping system variables under control will also allow us to examine product properties as well.

10- Packaging - Shipping



Approved products are packaged and shipped to their customers.

In this process, firstly the products are put into boxes and appropriate barcode labels are placed onto each box. Then these small product boxes are placed into bigger delivery cardboard boxes with once again their barcodes appropriately placed on. Finally, the delivery boxes are stacked onto the palettes which are then wrapped and loaded on EntekLED Manufacturing truck.






VERSIO RECESSED

INDOOR LIGHTING » ARCHITECTURAL » LED RECESSED PANEL

www.entekled.com.tr








Perfect for offices, the well distributed light enhances productivity and reduce fatigue. They are typically recessed, sitting above the ceiling grid but can also be installed on a hard ceiling using a surface mount kit. LED panels are ideal for retrofitting your fluorescent fixtures and in turn save an average of 38% on your energy bill.

po /	TECHNICAL D				
Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
SPG1	10	Versio Recessed Panel 1	1080	300-300-50	
SPG2	20	Versio Recessed Panel 2	2120	300-600-65	
SPG3	33	Versio Recessed Panel 3	3795	600-600-65	
SPG4	36	Versio Recessed Panel 4	3975	300-1200-65	

TECHNICAL OPTIONS Teknik Seçenekler					
• Dali	• Dimmer	• Emergency Kit			


~/		Y CERTIFI e Sertifika		
	CE	TSE	RoHS	

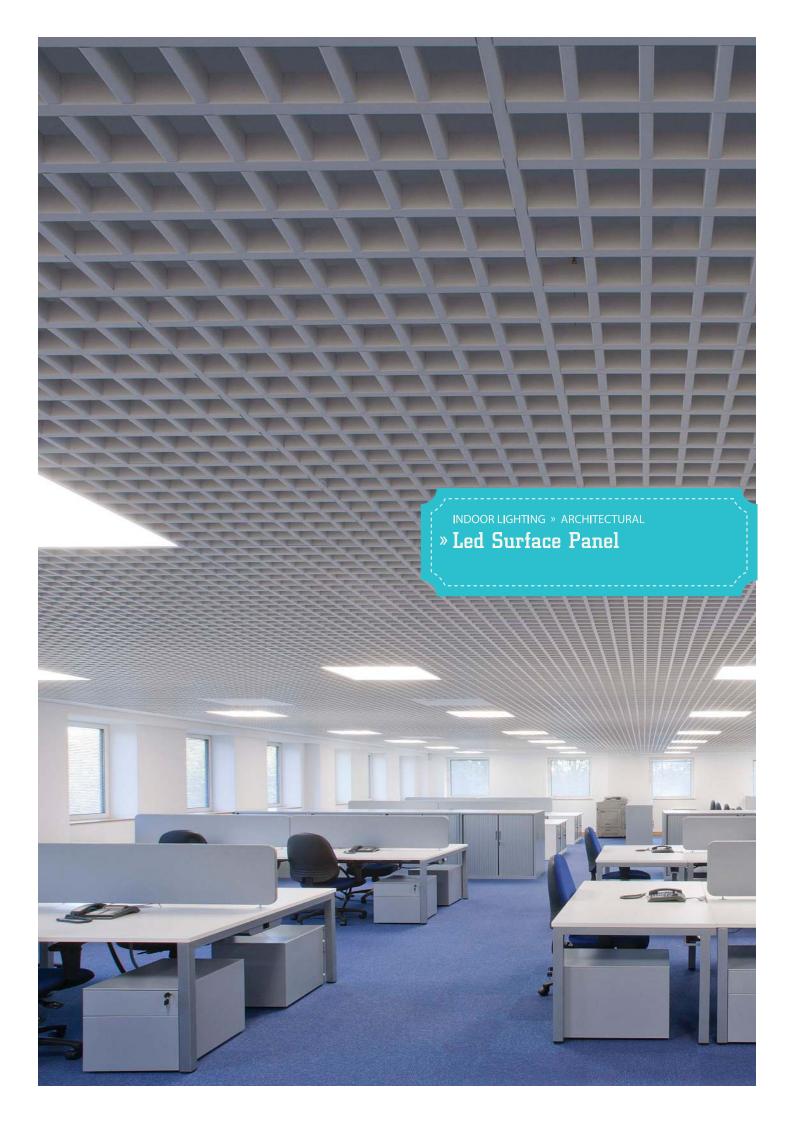


VERSIO SURFACE

INDOOR LIGHTING » ARCHITECTURAL » LED SURFACE PANEL









TECHNICAL FEATURES Teknik Özellikler

	Te le	!KI	lik Özellikler	
	Installation	:	Surface	
	Warranty	:	5 Years	
	Lamp Type	:	LED	
	Housing	:	Aluminium	
Ì	Glass	:	Diffuser	
	IP	:	40	
	Kelvin	:	3000 - 4000 - 6000	
	CRI	:	>80	
	Led Lifetime	:	50.000 h	
	Power Supply	:	110-240V 50-60Hz	
	Op. Temp.	:	-20°C / +45°C	
Ì				

Perfect for offices, the well distributed light enhances productivity and reduce fatigue. LED panels are ideal for retrofitting your fluorescent fixtures and in turn save an average of 38% on your energy bill. These panels which can be either recessed or suspended provide a visually comfortable and uniform light and are fully dimmable.

TECHNICAL DETAILS Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
SPGG1	10	Versio Surface Panel 1	1080	300-300-50	
SPGG2	20	Versio Surface Panel 2	2120	300-600-65	
SPGG3	33	Versio Surface Panel 3	3795	600-600-65	
SPGG4	36	Versio Surface Panel 4	3975	300-1200-65	

TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

C ← TSE RoHS




ORANGE STERILE

INDOOR LIGHTING » ARCHITECTURAL » LED STERILE PANEL









TECHNICAL FEATURES

— le	tnik Ozellikler	
Installation	: Recessed	
Warranty	: 5 Years	
Lamp Type	: LED	
Housing	: Aluminium	
Glass	: Diffuser+ Tempered Glass	
IP	: 65	
Kelvin	: 3000 - 4000 - 6000	
CRI	: >80	
Led Lifetime	: 50.000 h	
Power Supply	: 110-240V 50-60Hz	
Op. Temp.	: -20°C / +45°C	

Orange Sterile is suitable hospitals where sterileness is needed. Additionally, with its antiglare diffuser and homogenous light distribution, provide you to create efficient work places. Orange Sterile is also used to enhance food safety through mold and bacteria control, extending product shelf life and production yields.

TECHNICAL DETAILS Teknik Detaylar


Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
OPG1	14	Orange Sterile Panel 1	1650	300-600-70	
OPG2	28	Orange Sterile Panel 2	3200	600-600-70	
OPG3	38	Orange Sterile Panel 3	4400	600-600-70	



QUALITY CERTIFICIATE


Kalite Sertifikaları

C € RoHS

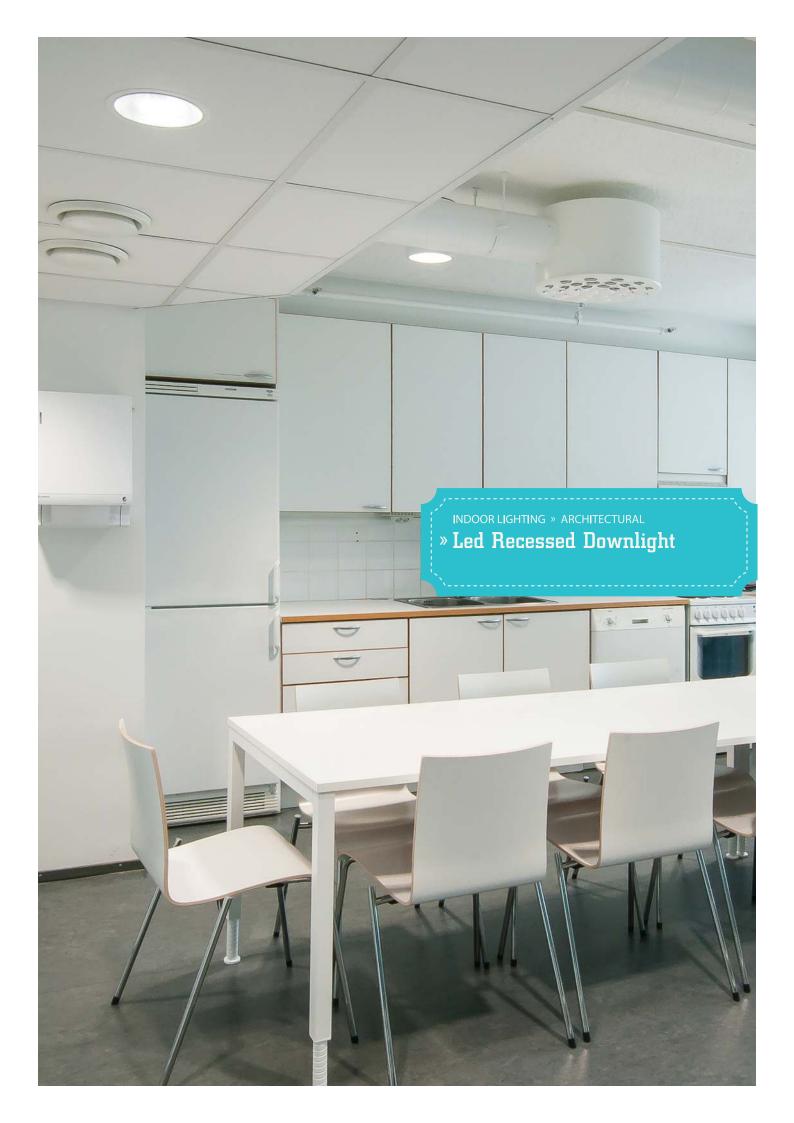







TECHNICAL FEATURES Teknik Özellikler

l	le le	KI	lik Özelliklei
	Installation	:	Recessed
ľ	Warranty	:	5 Years
ľ	Lamp Type	:	LED
ľ	Housing	:	Aluminium
ľ	Glass	:	Reflector
	IP	:	20
	Kelvin	:	3000 - 4000 - 6000
	CRI	:	>80
	Led Lifetime	:	50.000 h
	Power Supply	:	110-240V 50-60Hz
	Op. Temp.	:	-20°C / +45°C
ı			

LED Downlights each offer different benefits from the beam distribution, trim selection and installation methods. Whether you are installing them in a new construction or in a retrofit application, they will fit seamlessly into your lighting application.

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
TAG1	30	Twist Single	3025	150x150	
TAG2	60	Twist Double	6180	150x285	
TAG3	90	Twist Trio	9220	150x415	


~	TECHNICAL Teknik Se	OPTIONS eçenekler
• Dali	• Dimmer	• Emergency Kit


QUALITY CERTIFICIATE Kalite Sertifikaları

((**RoHS**









TECHNICAL FEATURES Teknik Özellikler

Installation	:	Recessed
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	Aluminium
Glass	:	Diffuser
IP	:	20
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

TECHNICAL OPTIONS Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

LED Downlights each offer different benefits from the beam distribution, trim selection and installation methods. Whether you are installing them in a new construction or in a retrofit application, they will fit seamlessly into your lighting application.

TECHNICAL DETAIL: Teknik Detaylar


Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
EDG1	6	Ela 1" Downlight	630	80-45-70	
EDG2	8	Ela 2" Downlight	885	100-55-85	
EDG3	10	Ela 3" Downlight	1100	117-55-105	
EDG4	15	Ela 4" Downlight	1690	147-55-130	
EDG5	20	Ela 5" Downlight	2180	173-55-158	
EDG6	23	Ela 6" Downlight	2470	190-55-175	
EDG8	26	Ela 8" Downlight	2830	231-55-214	


QUALITY CERTIFICIATE Kalite Sertifikaları

C € TSE RoHS











TECHNICAL FEATURES Teknik Özellikler

Installation : Recessed Warranty : 5 Years Lamp Type : COB : Aluminium Housing Glass : Reflector IΡ : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

LED Downlights each offer different benefits from the beam distribution, trim selection and installation methods. Whether you are installing them in a new construction or in a retrofit application, they will fit seamlessly into your lighting application.

TECHNICAL DETAIL!

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
GCG1	10	Gate COB Downlight	1100	131-75-115	
GCG2	20	Gate COB Downlight	2230	131-75-115	
GCG3	30	Gate COB Downlight	3175	147-130-130	
GCG4	40	Gate COB Downlight	4230	147-130-130	

TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

C ← TSE RoHS

www.entekled.com.ti



	NICAL FEATURES knik Özellikler
Installation	: Recessed
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Diffuser
IP	: 20
Kelvin	: 3000 - 4000 - 6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

LED Downlights each offer different benefits from the beam distribution, trim selection and installation methods. Whether you are installing them in a new construction or in a retrofit application, they will fit seamlessly into your lighting application.

O°	TECHNICAL D Teknik Def				
Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
SDG1	6	Slot 2" Downlight	730	95-65-85	
SDG2	8	Slot 3" Downlight	940	117-70-105	
SDG3	10	Slot 4" Downlight	1110	147-75-130	
SDG4	15	Slot 5" Downlight	1680	173-75-158	
SDG5	18	Slot 6" Downlight	1970	190-85-175	
SDG6	23	Slot 8" Downlight	2450	229-80-214	


QUALITY CERTIFICIATE Kalite Sertifikaları


C € TSE RoHS



DISC RECESSED

INDOOR LIGHTING » ARCHITECTURAL » LED RECESSED DOWNLIGHT



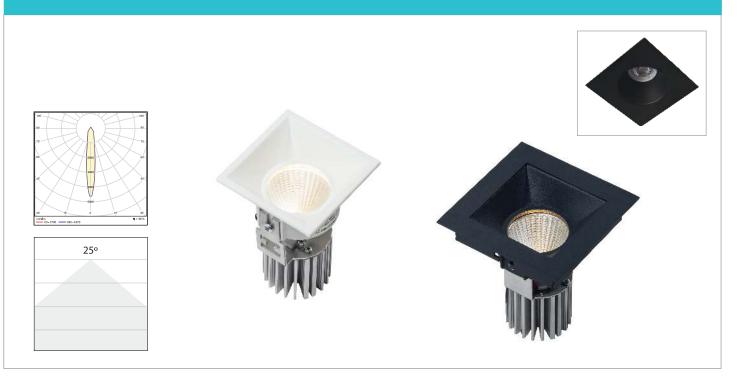

TECHNICAL FEATURES Teknik Özellikler ... Installation : Recessed Warranty : 5 Years Lamp Type : COB Housing : Aluminium ΙP : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz : -20°C / +45°C Op. Temp.


LED Downlights each offer different benefits from the beam distribution, trim selection and installation methods. Whether you are installing them in a new construction or in a retrofit application, they will fit seamlessly into your lighting application.

ltem	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
DRSG1	10	Disc Recessed Downlight	968	90-120-82	







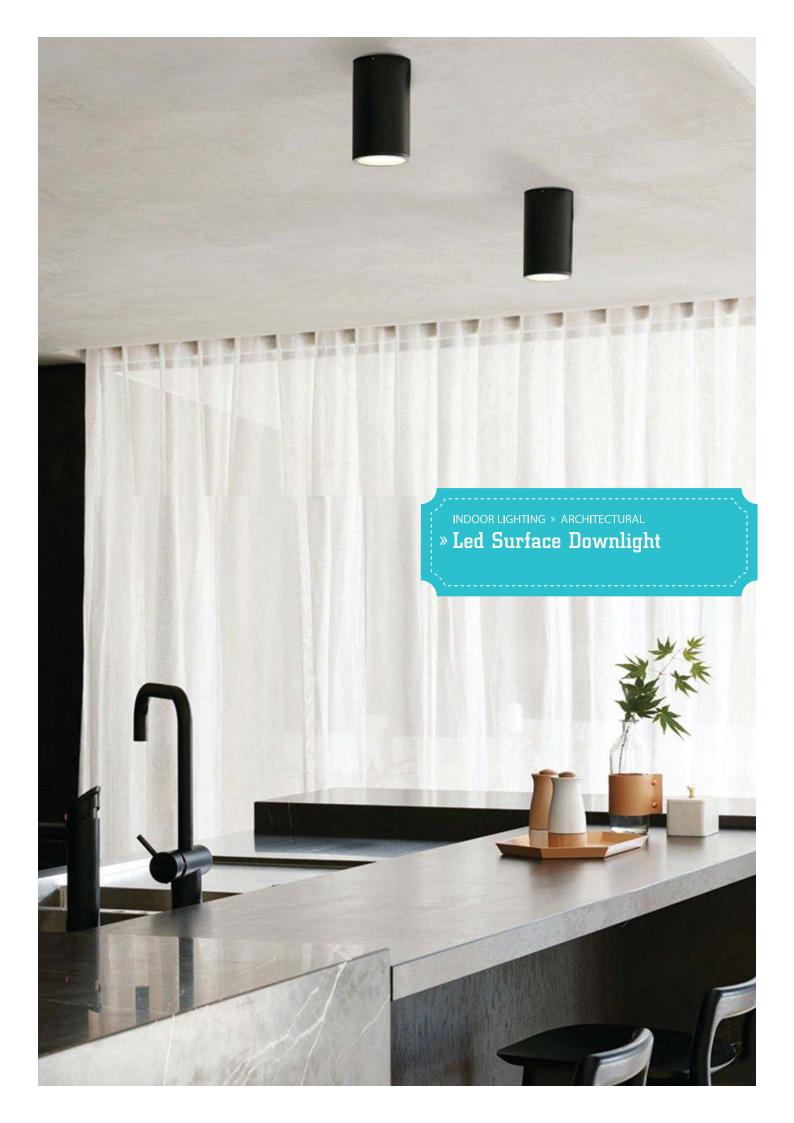


TATA SURFACE


INDOOR LIGHTING » ARCHITECTURAL » LED SURFACE DOWNLIGHT











TECHNICAL FEATURES

	eknik Özellikler
Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Diffuser
IP	: 20
Kelvin	: 3000 - 4000 - 6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

LED Downlights each offer different benefits from the beam distribution, trim selection and installation methods. Whether you are installing them in a new construction or in a retrofit application, they will fit seamlessly into your lighting application.

TECHNICAL DETAILS

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
TDG1	10	Tata Surface Downlight 1	968	90-150	
TDG2	15	Tata Surface Downlight 2	1485	126-150	
TDG3	20	Tata Surface Downlight 3	2100	133-150	
TDG4	30	Tata Surface Downlight 4	3170	150-180	



• Dali • Dimmer • Emergency Kit



C ∈ RoHS


HENDERSON

INDOOR LIGHTING » ARCHITECTURAL » LED SURFACE DOWNLIGHT



www.entekled.com.ti







TECHNICAL FEATURES Teknik Özellikler Installation : Surface

Warranty : 5 Years Lamp Type : COB : Aluminium Housing Glass : Reflector ΙP : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz

: -20°C / +45°C

LED Downlights each offer different benefits from the beam distribution, trim selection and installation methods. Whether you are installing them in a new construction or in a retrofit application, they will fit seamlessly into your lighting application.

TECHNICAL DETAIL Teknik Detaylar

DSG1	8	Henderson Surface Square 1	775	60-60-160	
DSG2	20	Henderson Surface Square 2	2180	100-100-160	

TECHNICAL OPTIONS
Teknik Seçenekler

Op. Temp.


• Dali • Dimmer • Emergency Kit


QUALITY CERTIFICIATE

Kalite Sertifikaları

C ∈ RoHS



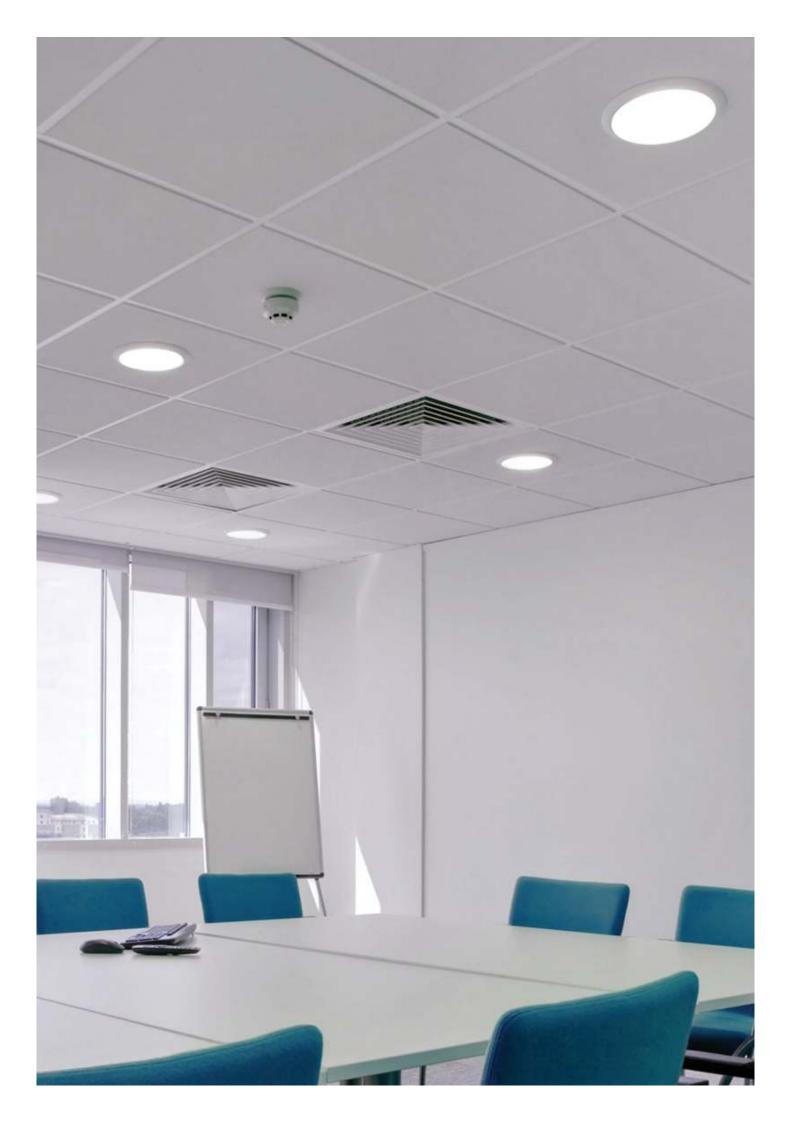


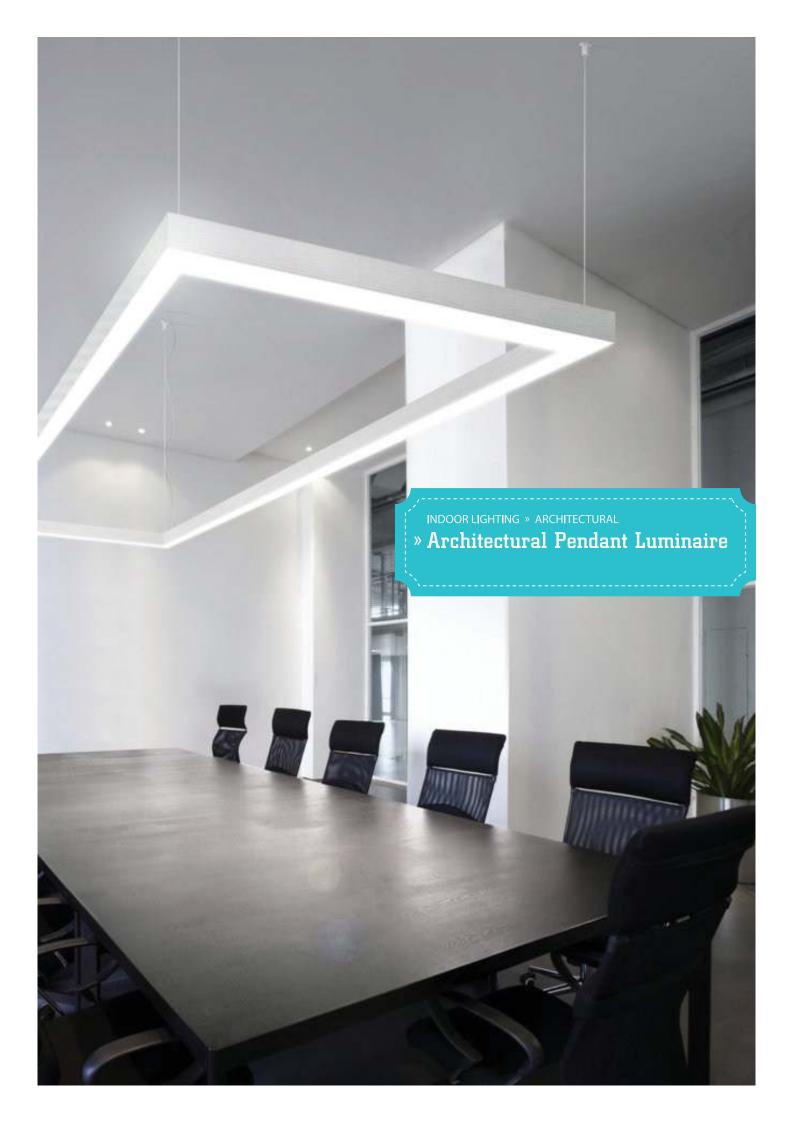


INDOOR LIGHTING » ARCHITECTURAL » ARCHITECTURAL PENDANT LUMINAIRE









TECHNICAL FEATURES

- le	KI	iik Ozeilikier
Installation	:	Suspended
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	Aluminium
Glass	:	Diffuser
IP	:	20
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

Suitable for suspended or surface mounting on cellings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The luminaire will be accurate and realistic

TECHNICAL DETAIL! Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
PLG1	28	Pavo Round Pendant 1	1600	85-300	
PLG2	60	Pavo Round Pendant 2	2850	85-500	
PLG3	88	Pavo Round Pendant 3	4900	85-800	
PLG4	128	Pavo Round Pendant 4	8000	85-1100	



• Dali • Dimmer • Emergency Kit




C€ RoHS

PAVO SQUARE



LIGHTING SOLUTIONS











TECHNICAL FEATURES Teknik Özellikler ... Installation : Suspended Warranty : 5 Years Lamp Type : LED : Aluminium Housing Glass : Reflector ΙP : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h

TECHNICAL OPTIONS
Teknik Seçenekler

Dali
Dimmer • Emergency Kit

: -20°C / +45°C

Power Supply: 110-240V 50-60Hz

Op. Temp.

Suitable for suspended or surface mounting on cellings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The luminaire will be accurate and realistic


Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)
PLGG1	41	Pavo Square 1	4650	300-600-79
PLGG2	55	Pavo Square 2	6200	600-600-79
PLGG3	70	Pavo Square 3	7800	300-1200-79






NDOOR LIGHTING » ARCHITECTURAL » ARCHITECTURAL PENDANT LUMINAIRE







TECHNICAL FEATURES Teknik Özellikler ... Installation : Suspended Warranty : 5 Years Lamp Type : LED Housing : Aluminium Glass : Diffuser IΡ : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80

Led Lifetime : 50.000 h

Op. Temp.

Power Supply: 110-240V 50-60Hz

: -20°C / +45°C

TECHNICAL OPTIONS
Teknik Seçenekler

Dali
Dimmer • Emergency Kit


Suitable for suspended or surface mounting on cellings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The luminaire will be accurate and realistic

em	Power (W)	Description	Light Output (Lm)	Dimensions (mm)
G1	60	Pavo Line Lineer	7310	1200-87-82





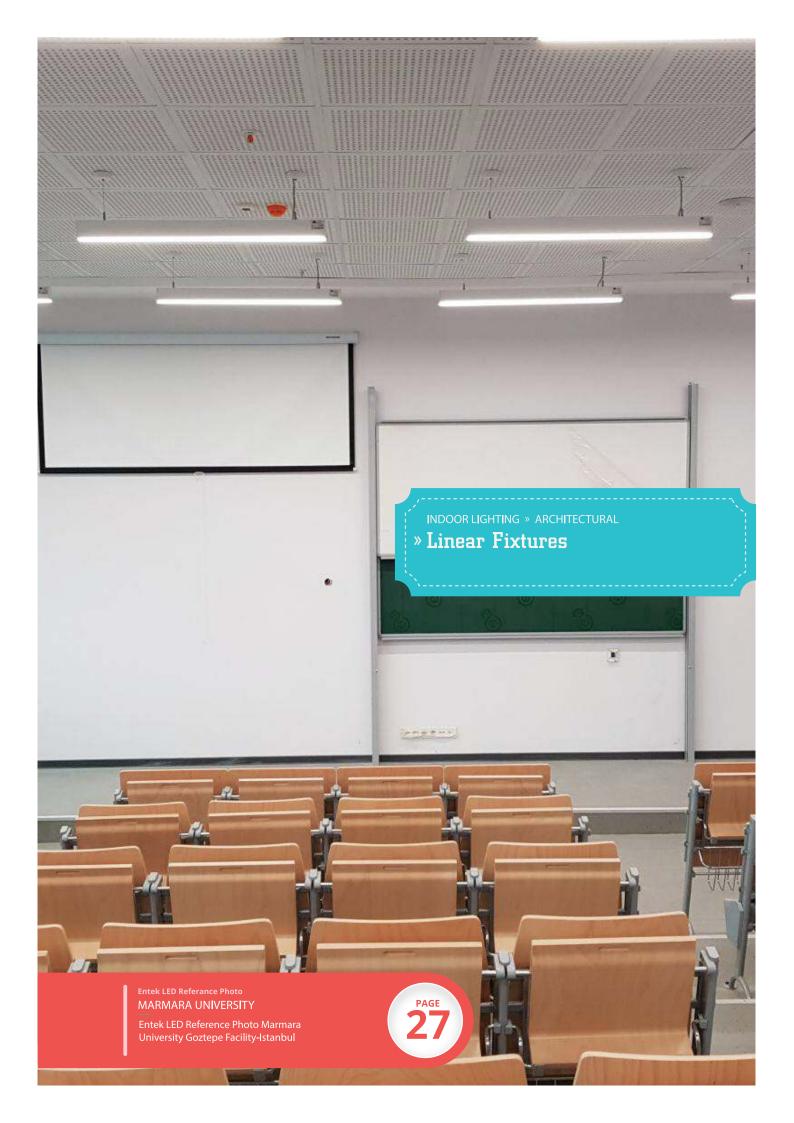



ALL AROUND THE WORLD


www.entekled.com.tr

VIGO LINEER RECESSED

INDOOR LIGHTING » ARCHITECTURAL » LINEAR FIXTURES





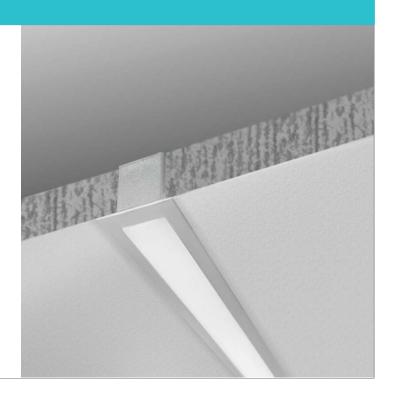

TECHNICAL FEATURES Teknik Özellikler

Installation : Recessed Warranty : 5 Years Lamp Type : LED : Aluminium Housing Glass : Diffuser ΙP : 40 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

Linears are the ideal replacement for traditional fluorescent strip luminaires in commercial, industrial and retail applications. Also offered are IP65+ rated luminaires for applications needing protection against water and dust infiltration as well as vandal proof luminaires.

TECHNICAL DETAIL Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)
VLG1	13	Vigo Lineer Recessed 1	1380	80-85-610
VLG2	19,5	Vigo Lineer Recessed 2	1820	80-85-890
VLG3	26	Vigo Lineer Recessed 3	2560	80-85-1170

TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

C € TSE RoHS

PAVO LINEER SURFACE

NDOOR LIGHTING » ARCHITECTURAL » LINEAR FIXTURES



www.entekled.com.tr



TECHNICAL FEATURES Teknik Özellikler ... Installation : Surface Warranty : 5 Years Lamp Type : LED : Aluminium Housing Glass : Diffuser ΙP : 40 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

Linears are the ideal replacement for traditional fluorescent strip luminaires in commercial, industrial and retail applications. Also offered are IP65+ rated luminaires for applications needing protection against water and dust infiltration as well as vandal proof luminaires.


O°	TECHNICAL D Teknik Det				
Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
PLG1	13	Pavo Lineer Surface 1	1380	55-85-300	
PLG2	19.5	Pavo Lineer Surface 2	1820	55-85-600	
PLG3	26	Pavo Lineer Surface 3	2560	55-85-900	


TECHNICAL OPTIONS
Teknik Seçenekler

Dali
Dimmer
Emergency Kit






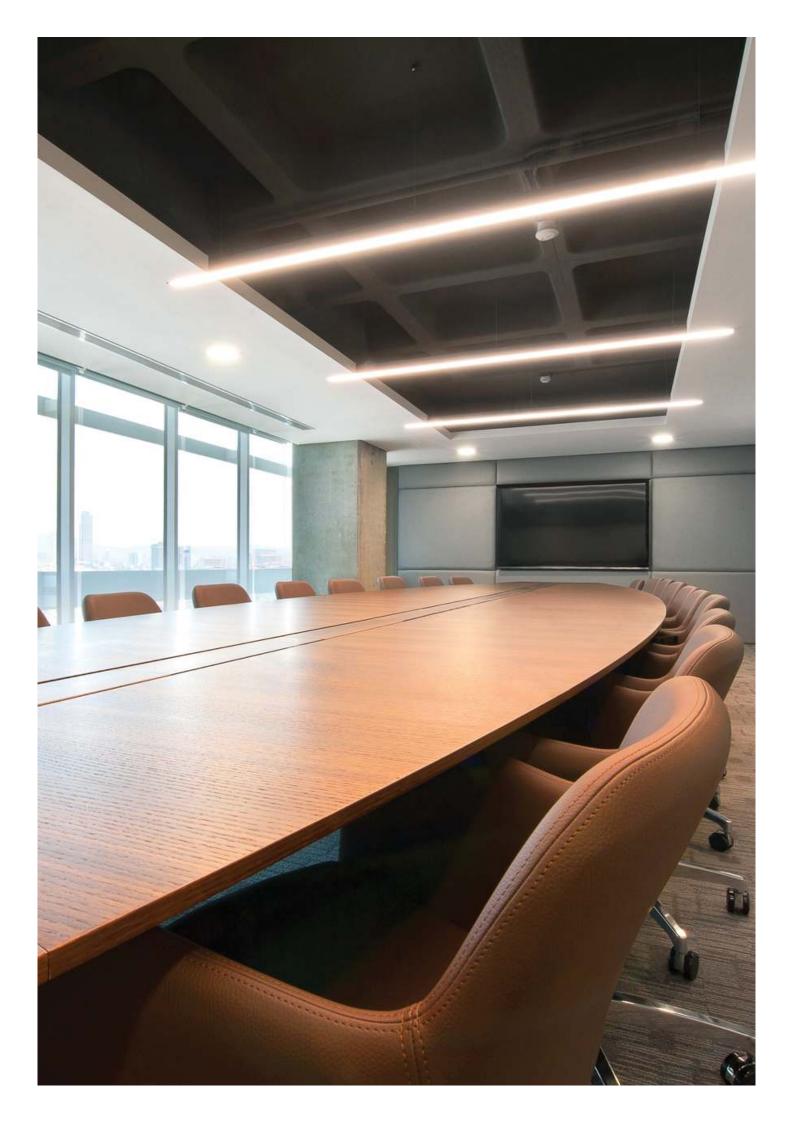

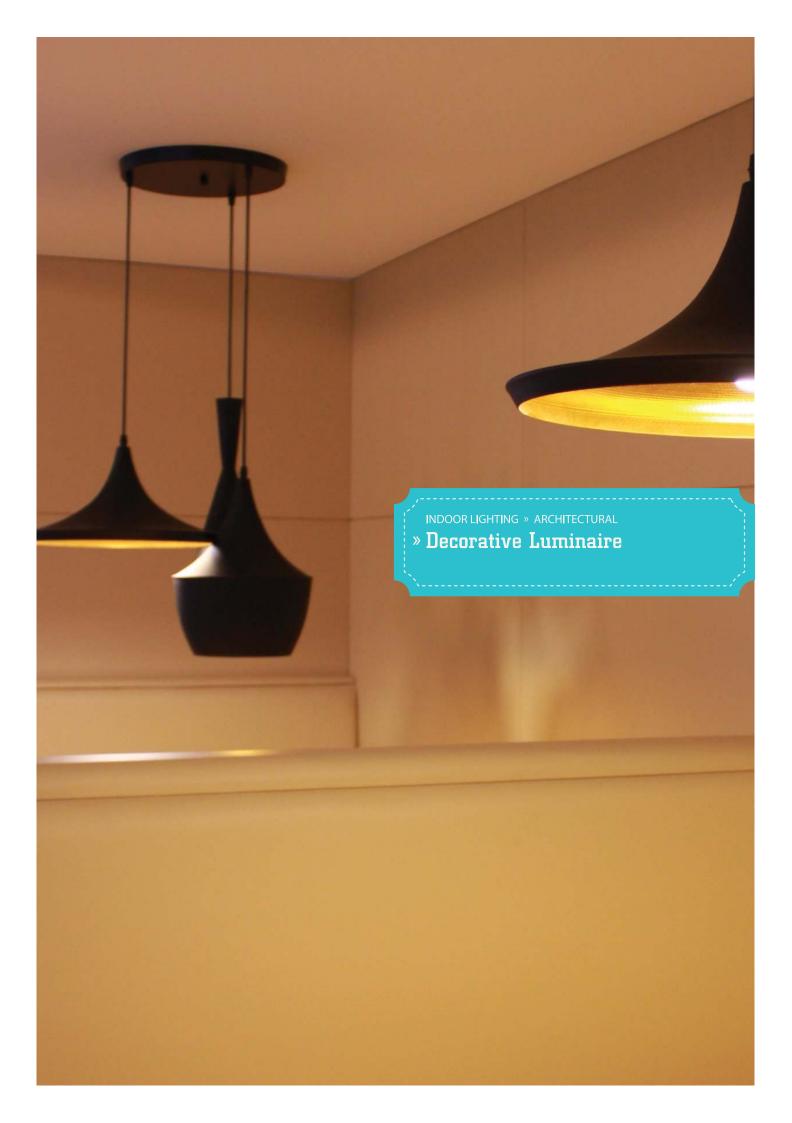



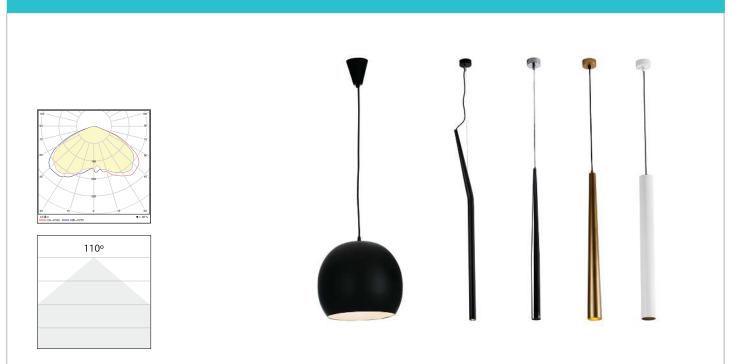


TECHNICAL FEATURES Teknik Özellikler ... Installation : Pendant : 5 Years Warranty Lamp Type : LED : Aluminium Housing Glass : Diffuser ΙP : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C


Enhance the beauty and character of your place with decorative lights.

O°	TECHNICAL D Teknik Det				
Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
RMD1	7	Raimond	540	Custom Design	


• Dali • Dimmer • Emergency Kit QUALITY CERTIFICIATE Kalite Sertifikaları ((**RoHS**

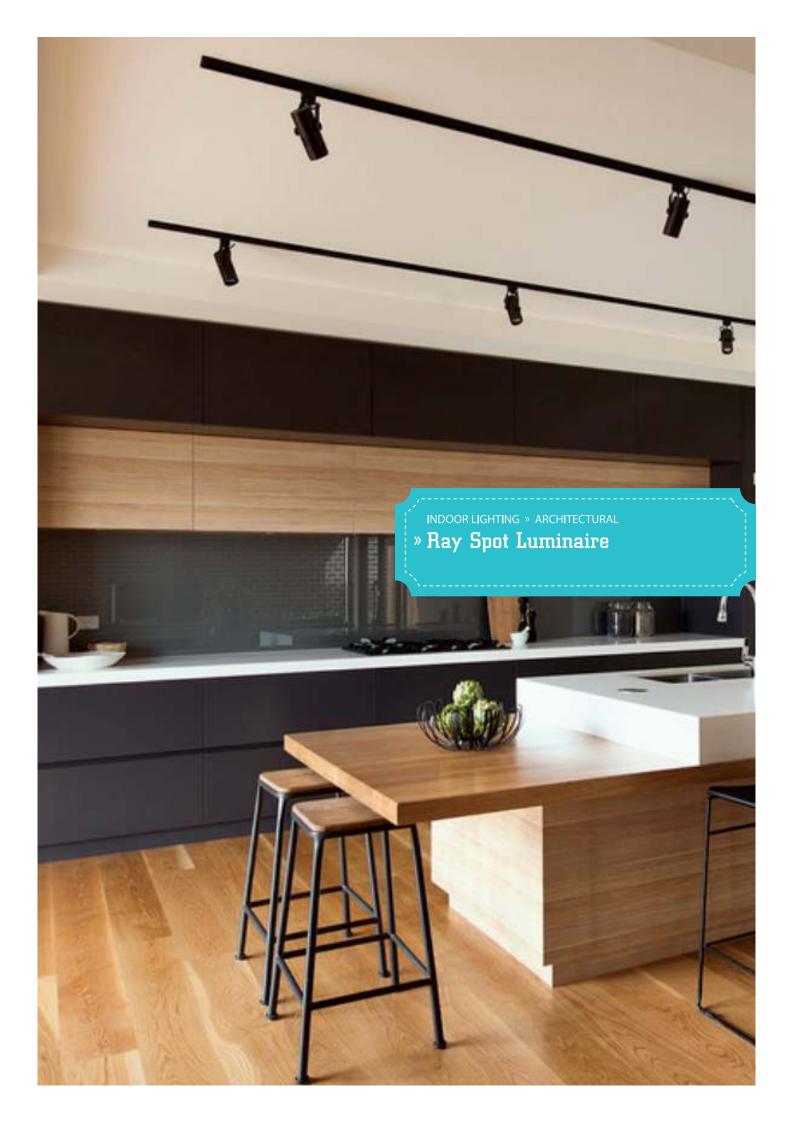





NOMAD



TECHNICAL FEATURES Teknik Özellikler

... Installation : Ray Surface Warranty : 5 Years Lamp Type : LED : Aluminium Housing Glass : Reflector IΡ : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

Spotlights separate details or objects from their surroundings. Use our LED spotlights to replace traditional halogen and incandescent spot lights in track lighting, retail and display lighting and recessed lighting.

	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
ST1	18	Nomad 1	1640	Q 100-80	
ST2	30	Nomad 2	2840	Q 100-80	
	30	Nomad 2	2840	Ц 100-80	_




• Dali • Dimmer • Emergency Kit



(€ **RoHS**

vww.entekled.com.tr







TECHNICAL FEATURES Teknik Özellikler

...

Installation : Ray Surface Warranty : 5 Years Lamp Type : LED : Aluminium Housing Glass : Reflector ΙP : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

Spotlights separate details or objects from their surroundings. Use our LED spotlights to replace traditional halogen and incandescent spot lights in track lighting, retail and display lighting and recessed lighting.

TECHNICAL DETAIL Teknik Detaylar

	Power (W)	Description	Light Output (Lm)	Dimensions (mm)
MRG1	10	Pure 1	960	Q 60-180
MRG2	20	Pure 2	1870	Q 60-180

TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit









TECHNICAL FEATURES

le	!KI	nik Özellikler
Installation	:	Ray Surface
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	Aluminium
Glass	:	Reflector
IP	:	20
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	·:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

Spotlights separate details or objects from their surroundings. Use our LED spotlights to replace traditional halogen and incandescent spot lights in track lighting, retail and display lighting and recessed lighting.

TECHNICAL DETAIL Teknik Detaylar

IRG1 10 Acron 1 880	0 60-150
HRG2 20 Acron 2 1730	0 60-150


TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit









... Installation : Ray Surface Warranty : 5 Years Lamp Type : COB LED : Aluminium Housing Glass : Reflector IΡ : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C


Spotlights separate details or objects from their surroundings. Use our LED spotlights to replace traditional halogen and incandescent spot lights in track lighting, retail and display lighting recessed lighting.


ARG1	20	Madon 1	2140	Q 126-170	
ARG2	30	Madon 2	3230	0 126-170	

• Dali • Dimmer • Emergency Kit QUALITY CERTIFICIATE Kalite Sertifikaları

((**RoHS**



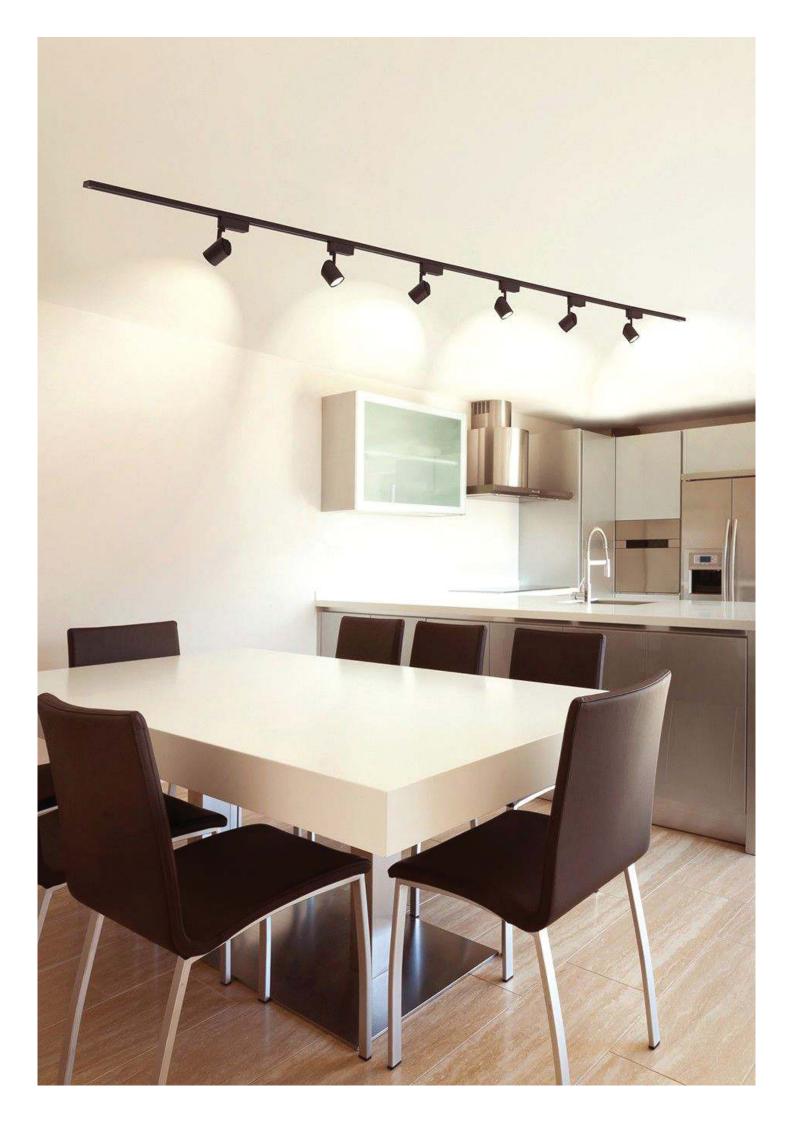

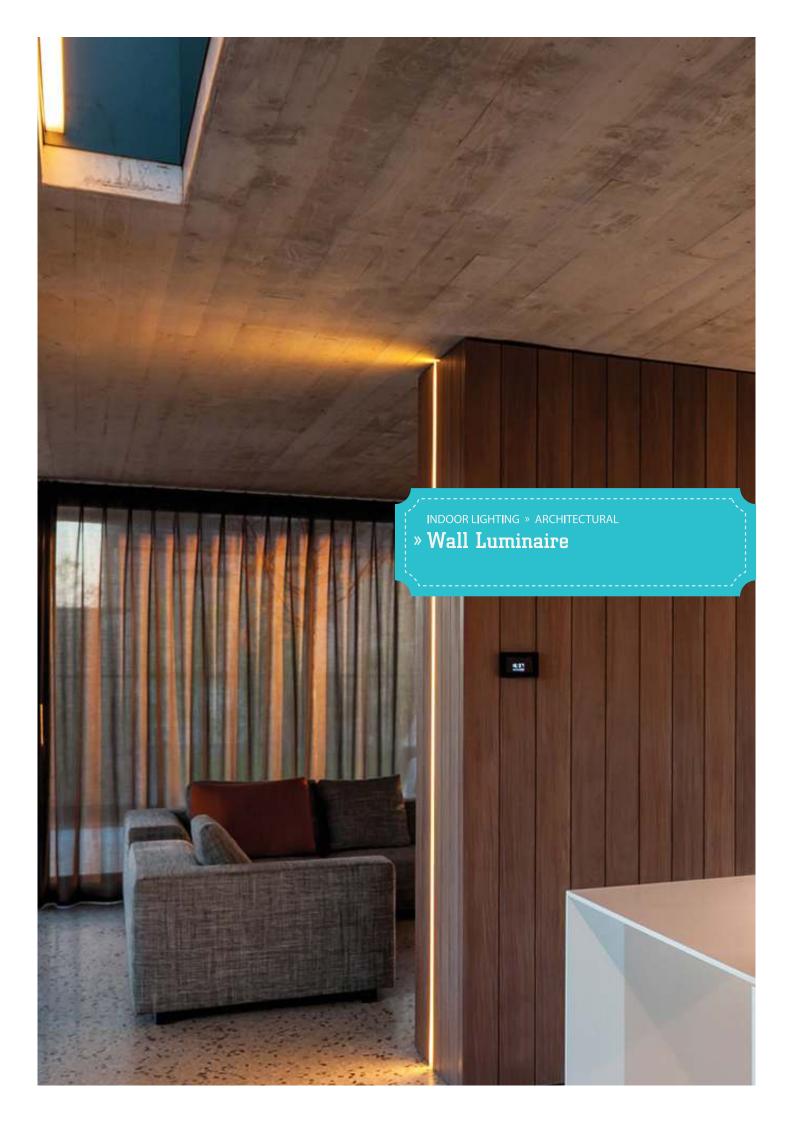


ALL AROUND THE WORLD

www.entekled.com.tr







25°

TECHNICAL FEATURES

le	knik Özellikler
Installation	: Surface
Warranty	: 5 Years
Lamp Type	: COB
Housing	: Aluminium
Glass	: Diffuser
IP	: 44
Kelvin	: 3000 - 4000 - 6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Suitable for surface mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime. The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAILS Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
PWG1	6	Polen Wall Luminaire 1	330	300-173	
PWG2	12	Polen Wall Luminaire 2	660	300-173	
PWG3	18	Polen Wall Luminaire 3	990	300-173	
PWG4	24	Polen Wall Luminaire 4	1520	300-173	


TECHNICAL OPTIONS
Teknik Seçenekler

• Dali
• Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

www.entekled.com.ti







TECHNICAL FEATURES

Te	knik Özellikler
Installation	: Surface
Warranty	: 5 Years
Lamp Type	: COB
Housing	: Aluminium
Glass	: Diffuser
IP	: 44
Kelvin	: 3000 - 4000 - 6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAIL!


ltem	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
RWG1	6	Ruten Wa ll Luminaire 1	330	170-120	
RWG2	12	Ruten Wall Luminaire 2	980	170-120	


TECHNICAL OPTIONS Teknik Seçenekler

• Dali • Dimmer • Emergency Kit






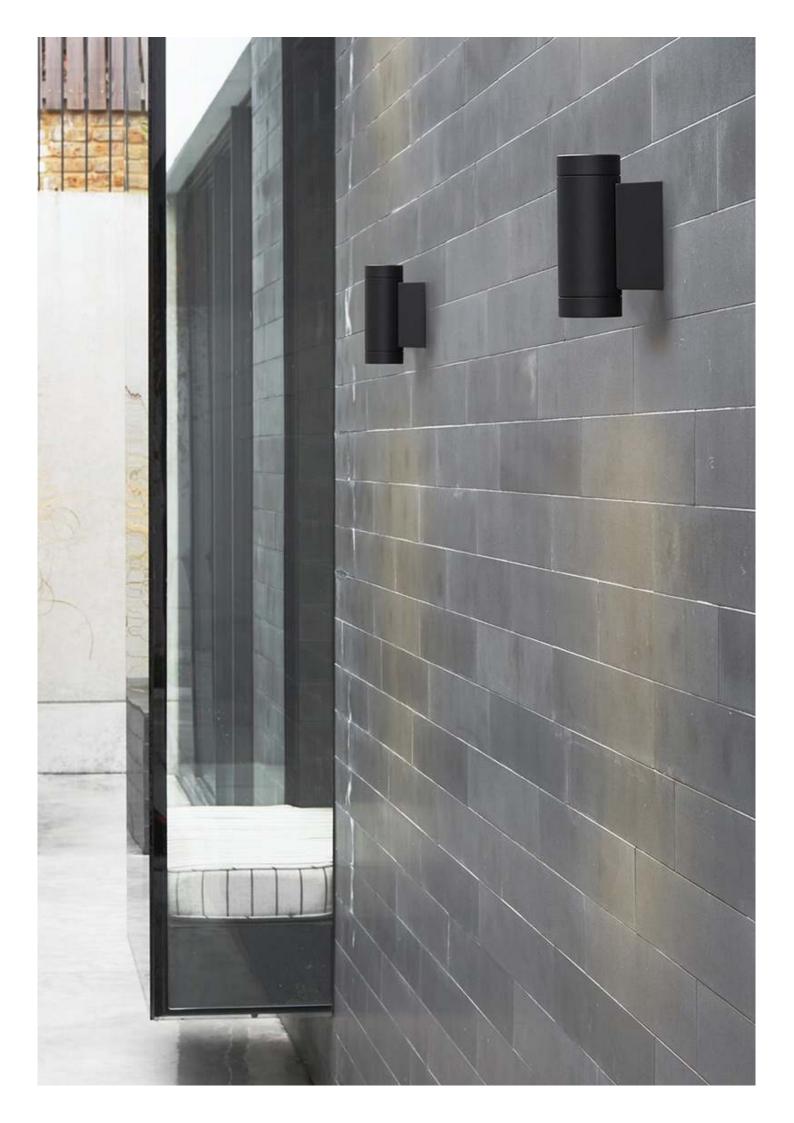


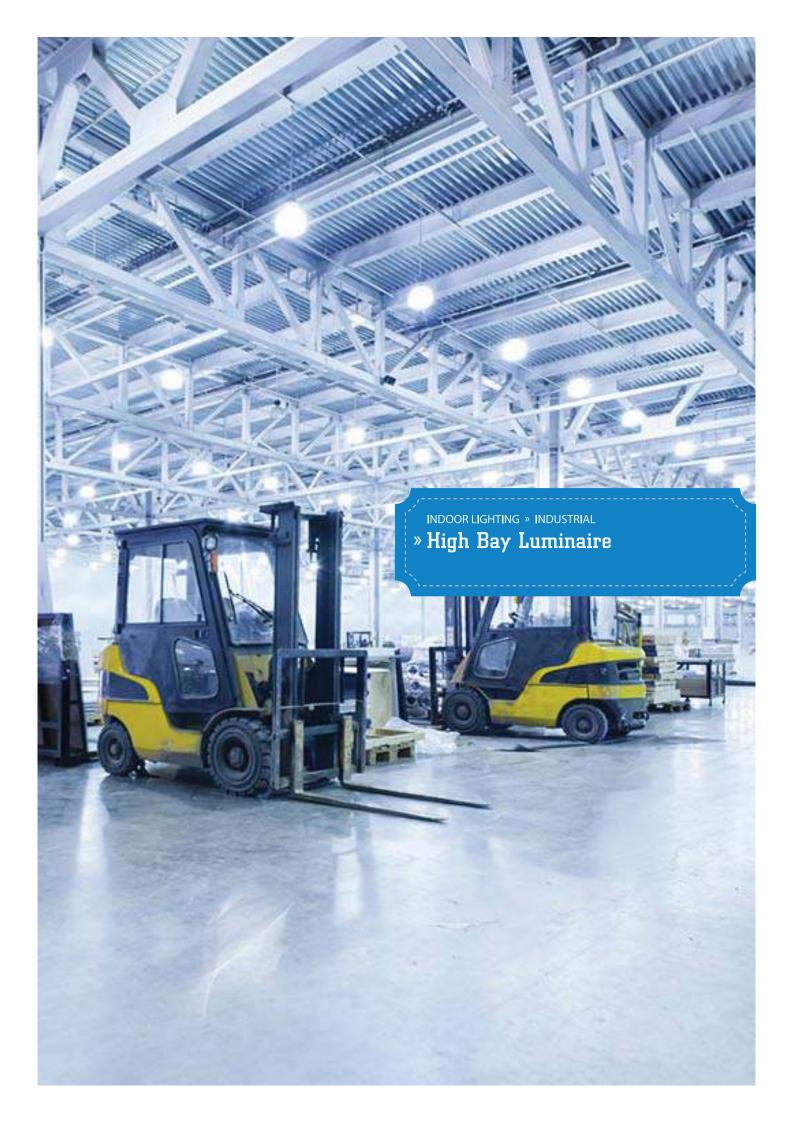









Installation	:	Surface
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	Aluminium
Glass	:	Tempered Glass
IP	:	65
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

High bay luminaires provide premium performance, quality and versatility. With up to 60% lower power consumption compared to traditional fluorescent and HID light sources, these luminaires are designed to reduce your total cost of ownership, while providing modern uniform light.

These luminaires are ideal for high ceilings (10' to 60') in warehouses, manufacturing facilities, gymnasiums, grocery stores or any other large indoor space, and they provide direct and semi-direct light.

TECHNICAL DETAILS Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
AEG1	60	Aura Highbay 1	7320	335-335-100	
AEG2	90	Aura Highbay 2	10980	335-335-100	
AEG3	120	Aura Highbay 3	14640	335-335-100	
AEG4	140	Aura Highbay 4	17080	335-335-100	





• Dali • Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

DORA

INDOOR LIGHTING » INDUSTRIAL » HIGH BAY LUMINAIRE







TECHNICAL FEATURES ...1 Teknik Özellikler

Installation : Surface Warranty : 5 Years Lamp Type : LED Housing : Aluminium Glass : Tempered Glass IΡ : 65 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

High bay luminaires provide premium performance, quality and versatility. With up to 60% lower power consumption compared to traditional fluorescent and HID light sources, these luminaires are designed to reduce your total cost of ownership, while providing modern uniform light.

These luminaires are ideal for high ceilings (10' to 60') in warehouses, manufacturing facilities, gymnasiums, grocery stores or any other large indoor space, and they provide direct and semi-direct light.

TECHNICAL DETAILS Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
DEG1	60	Dora Highbay 1	7200	600-125-55	
DEG2	75	Dora Highbay 2	8600	900-125-56	
DEG3	90	Dora Highbay 3	10250	1200-125-57	
DEG4	120	Dora Highbay 4	13400	1200-125-58	
DEG5	150	Dora Highbay 5	15320	1500-125-59	





• Dali • Dimmer • Emergency Kit




((**RoHS**




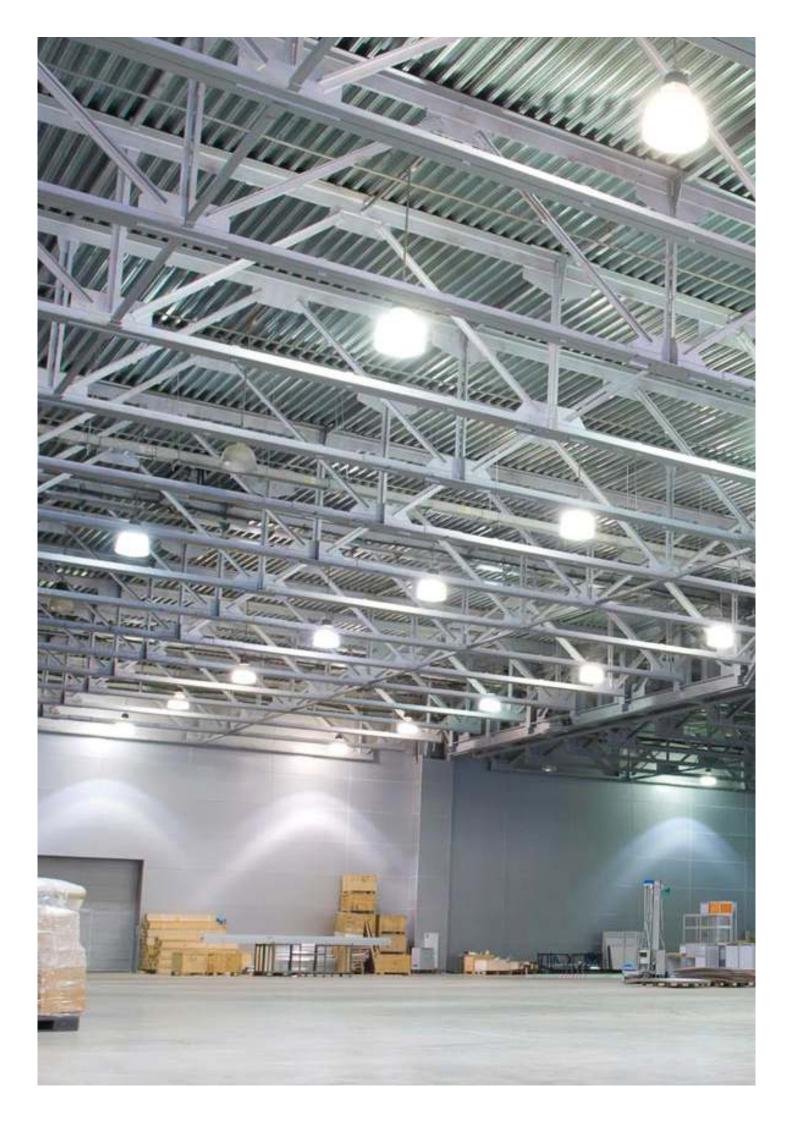

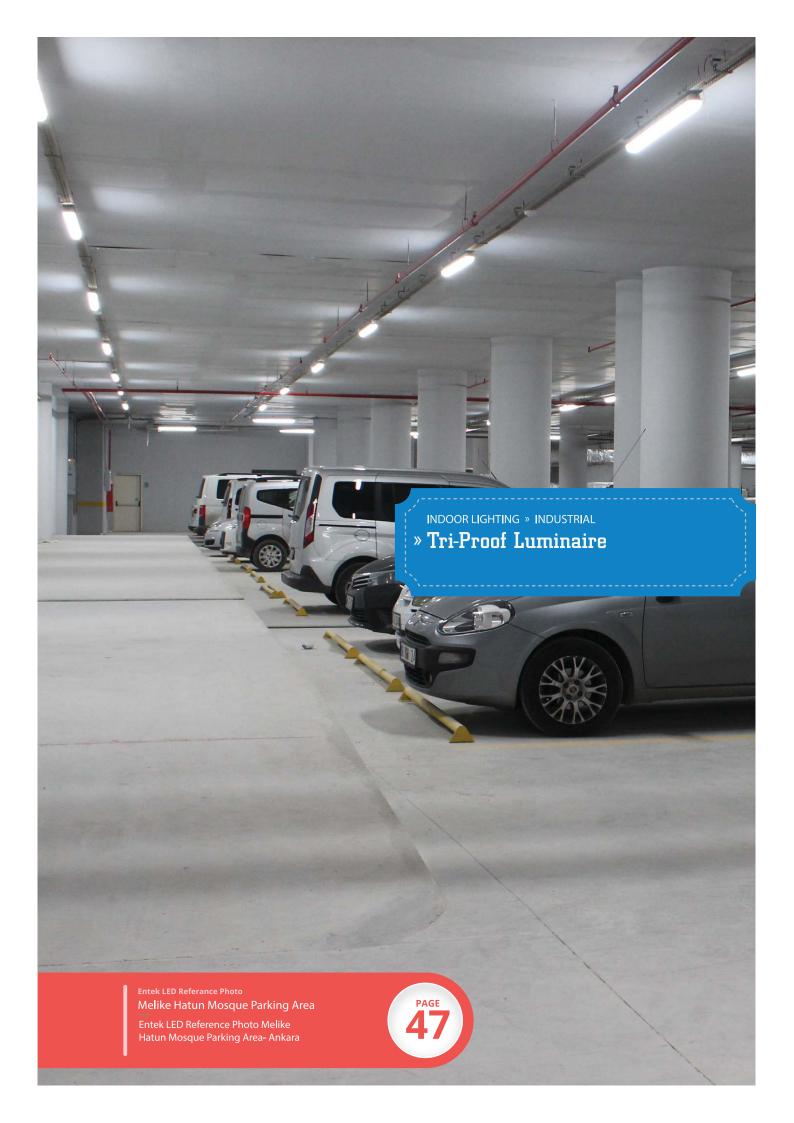









Installation : Surface Warranty : 5 Years Lamp Type : LED : Aluminium Housing Glass : PC ΙP : 65 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAILS Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
REGG1	18	Reg Tri-Proof 1	1764	600-90-75	
REGG2	38	Reg Tri-Proof 2	3724	1200-90-75	
REGG3	60	Reg Tri-Proof 3	5880	1500-90-75	

TECHNICAL OPTIONS Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları


C ← TSE RoHS











le le	KI	lik Özelliklei
Installation	:	Surface
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	PC
Glass	:	PC
IP	:	65
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAILS Teknik Detaylar


Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
REG1	10	ROB Water-Proof 1	980	600-90-75	
REG2	20	ROB Water-Proof 2	1760	600-90-75	
REG3	30	ROB Water-Proof 3	1760	1200-90-75	
REG4	38	ROB Water-Proof 4	3250	1200-90-75	








C ← TSE RoHS



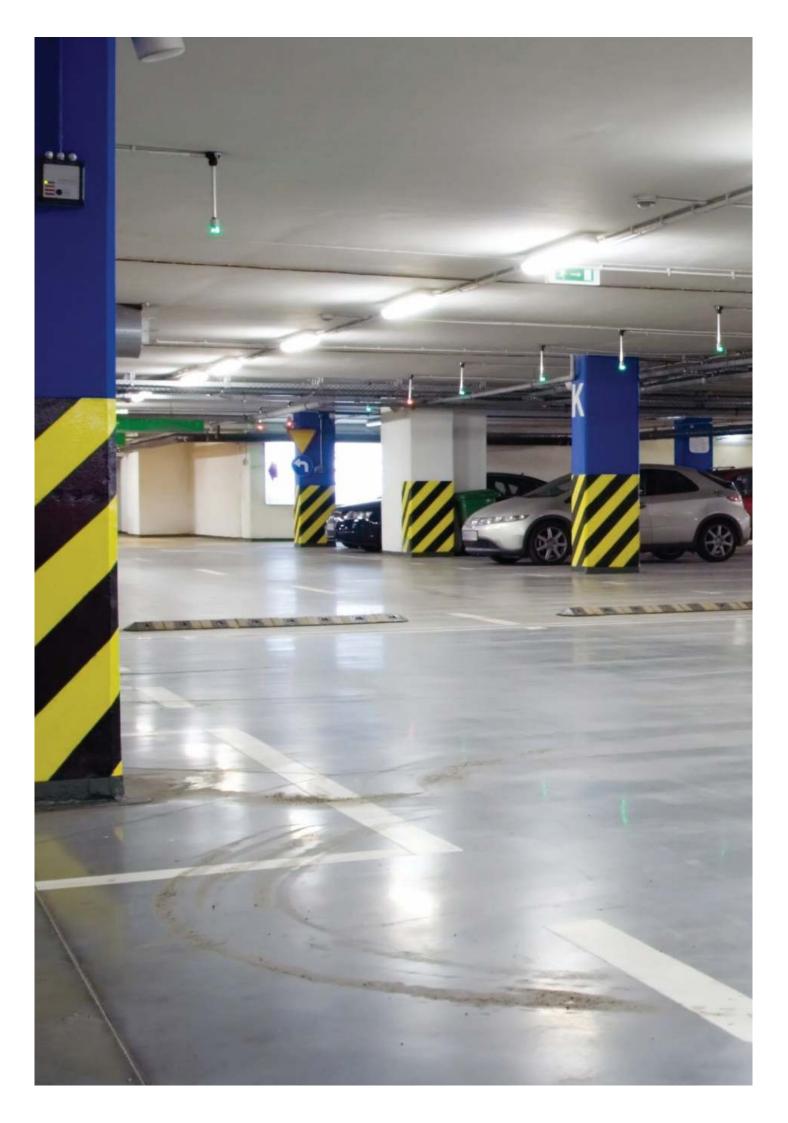

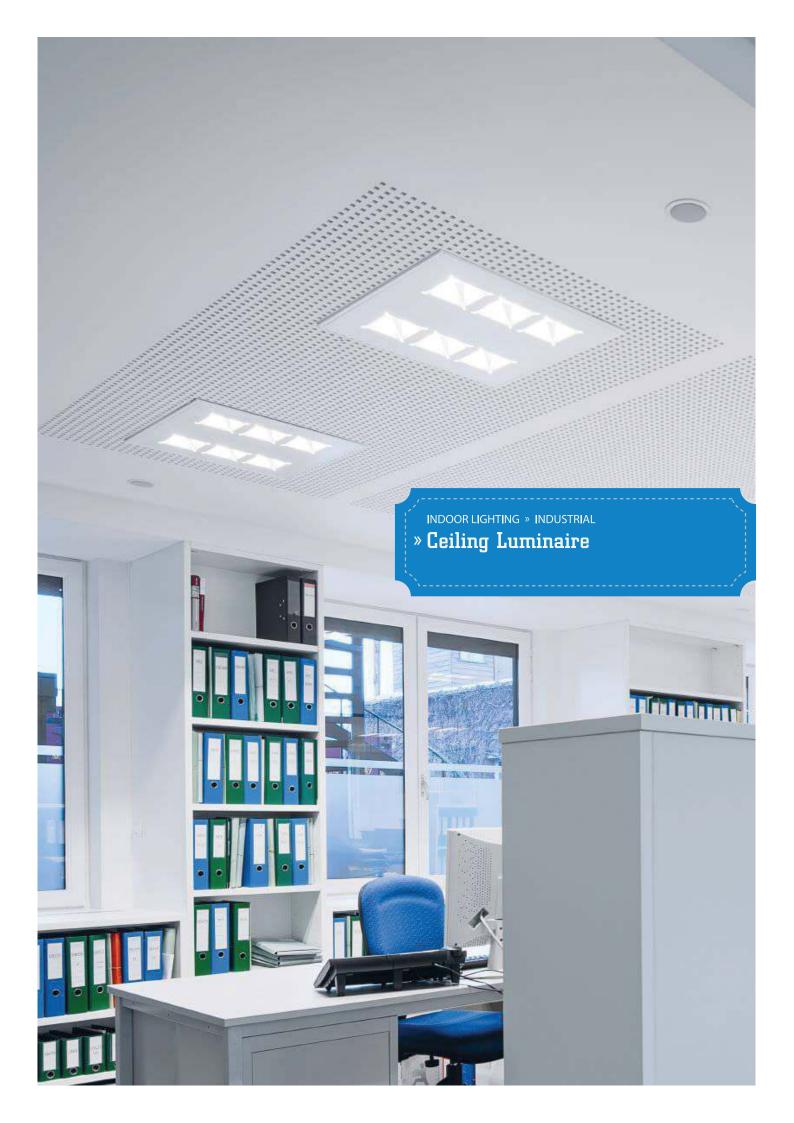









Installation : Surface Warranty : 3 Years Lamp Type : LED : Aluminium Housing Glass : PC ΙP : 20 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

LED ceiling-mount luminaires, with their low-profile white frosted acrylic diffusers, make a perfect solution for commercial and decorative applications.


TECHNICAL DETAILS Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
FIG1	20	Sens Luminaire	1640	Q 300-100	


TECHNICAL OPTIONS Teknik Seçenekler


• Dali • Dimmer • Emergency Kit



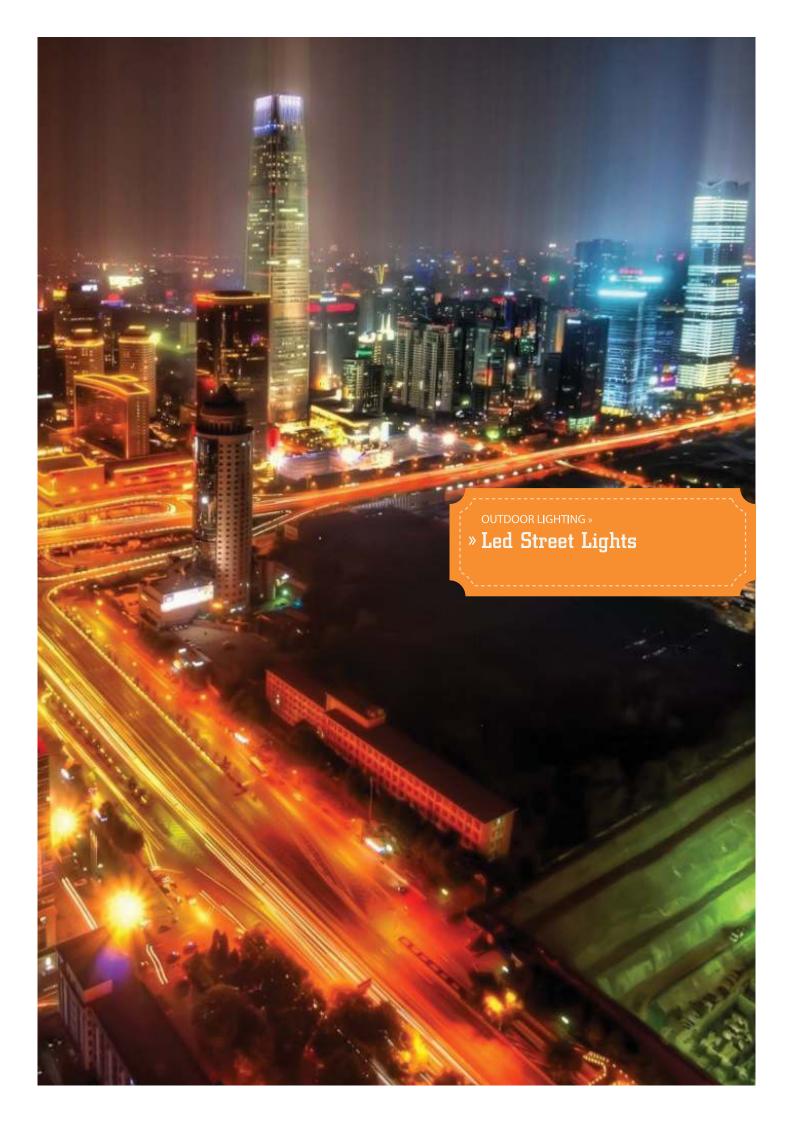







Warranty : 5 Years Lamp Type : Power LED Housing : Aluminium Glass : 5mm Tempered Glass ΙP : 65 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz : -20°C/+45°C Op. Temp.

Die-cast aluminium and designed with a very small exposed to wind. Clear, tempered glass, resistant to thermal shock and impacts. Suitable for dimming option.

TECHNICAL DETAIL Teknik Detaylar

Item	Power (W)	Description	Number of Led	Light Output (Lm)	Dimensions (mm)	
DLTG1	60	Delta 1	24	7200	630-280-77	
DLTG2	80	Delta 2	36	9600	630-280-77	
DLTG3	100	Delta 3	48	12000	630-280-77	
DLTG4	120	Delta 4	60	14400	630-280-77	
DLTG5	140	Delta 5	60	16800	630-280-77	

TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

QUALITY CERTIFICIATE


Kalite Sertifikaları


C€ TSE RoHS 🔣



OUTDOOD LICHTING * LED STREET LICHT









TECHNICAL FEATURES

Warranty : 5 Years Lamp Type : Power LED Housing : Aluminium : Tempered Glass Glass ΙP : 66 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz : -20°C/+45°C Op. Temp.



• Dali • Dimmer • Emergency Kit

Die-cast aluminium and designed with a very small exposed to wind. Clear, tempered glass, resistant to thermal shock and impacts. Suitable for dimming option.

TECHNICAL DETAIL Teknik Detaylar

Item	Power (W)	Description	Number of Led	Light Output (Lm)	Dimensions (mm)	
RSSG1	30	Spec Rim 1	24	3150	560-240-100	
RSSG2	50	Spec Rim 2	24	6150	560-240-100	
RSSG3	60	Spec Rim 3	24	7150	560-240-100	
RSSG4	75	Spec Rim 4	24	8650	560-240-100	
RSSG5	90	Spec Rim 5	24	10150	560-240-100	
RSSG6	100	Spec Rim 6	24	11150	560-240-100	





CE TSE RoHS











Warranty	:	5 Years
Lamp Type	:	Power LED
Housing	:	Aluminium
Glass	:	5mm Tempered Glass
IP	:	66
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

Die-cast aluminium and designed with a very small exposed to wind. Clear, tempered glass, resistant to thermal shock and impacts. Suitable for dimming option.

TECHNICAL DETAIL Teknik Detaylar

Item	Power (W)	Description	Number of Led	Light Output (Lm)	Dimensions (mm)	
DSSG1	120	Spec Dau 1	48	13150	708-230-100	
DSSG2	140	Spec Dau 2	48	14840	708-230-100	
DSSG3	150	Spec Dau 3	48	16150	708-230-100	
DSSG4	185	Spec Dau 4	48	19650	708-230-100	
DSSG5	200	Spec Dau 4	48	21150	708-230-100	


TECHNICAL OPTIONS
Teknik Seçenekler

Dali
Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

CE TSE RoHS



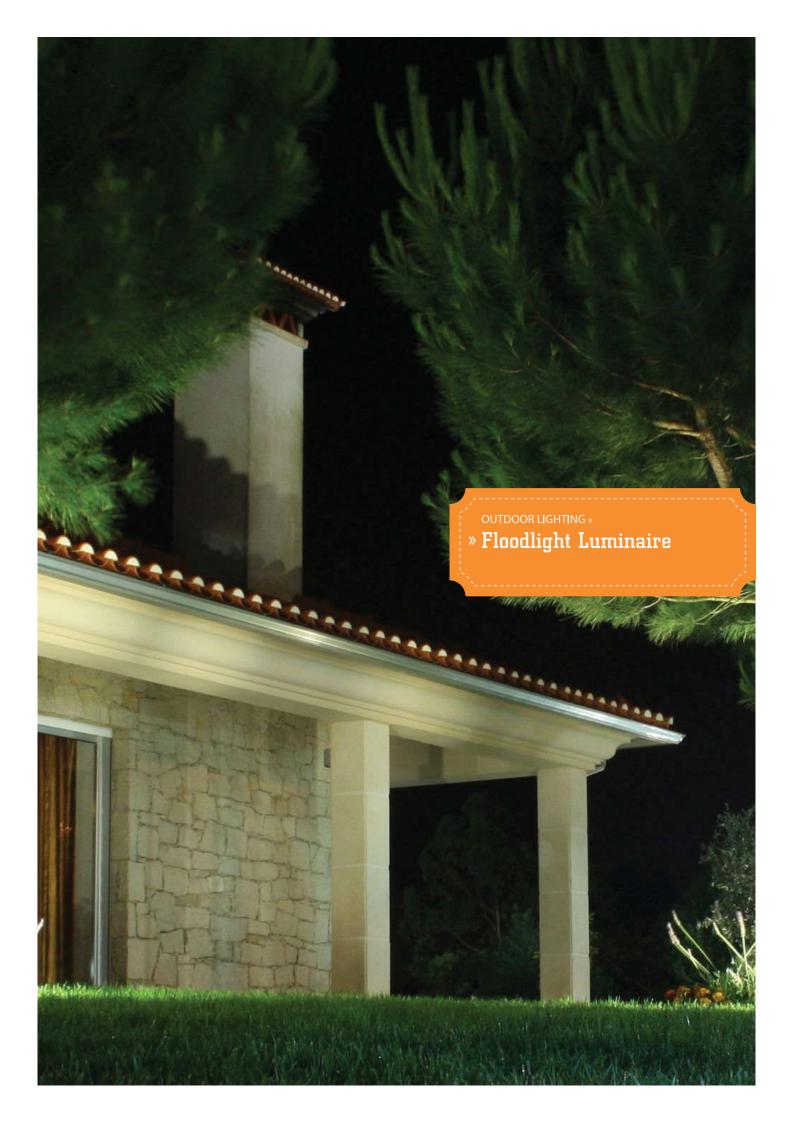


HOUSTEN RIM

OUTDOOR LIGHTING » FLOODLIGHT LUMINAIRE

www.entekled.com.ti





TECHNICAL FEATURES Teknik Özellikler

Warranty : 5 Years Lamp Type : Power LED Housing : Aluminium Glass : Tempered Glass ΙP : 66 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz : -20°C/+45°C Op. Temp.

TECHNICAL OPTION: Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

Housten series meets a variety of lighting needs across three different applications: architectural, site lighting and signage. A choice of optics makes it an extremely flexible and versatile LED solution, delivers excellent quality of light just where it is required.

TECHNICAL DETAIL Teknik Detaylar

Item	Power (W)	Description	Number of Led	Light Output (Lm)	Dimensions (mm)	
RFG1	30	Housten Rim 1	24	3150	394-240-100	
RFG2	50	Housten Rim 2	24	6150	394-240-100	
RFG3	60	Housten Rim 3	24	7150	394-240-100	
RFG4	75	Housten Rim 4	24	8650	394-240-100	
RFG5	90	Housten Rim 5	24	10150	394-240-100	
RFG6	100	Housten Rim 6	24	11150	394-240-100	

QUALITY CERTIFICIATE Kalite Sertifikaları


C€ TSE RoHS ∰



HOUSTEN DAU

OUTDOOR LIGHTING » FLOODLIGHT LUMINAIRE





TECHNICAL FEATURES Teknik Özellikler

Warranty	: 5 Years	
Lamp Type	: Power LED	
Housing	: Aluminium	
Glass	: 5mm Tempered Glass	
IP	: 66	
Kelvin	: 3000 - 4000 - 6000	
CRI	: >80	
Led Lifetime	: 50.000 h	
Power Supply	: 110-240V 50-60Hz	
Op. Temp.	: -20°C / +45°C	

Housten series meets a variety of lighting needs across three different applications: architectural, site lighting and signage. A choice of optics makes it an extremely flexible and versatile LED solution, delivers excellent quality of light just where it is required.

TECHNICAL DETAIL Teknik Detaylar

Item	Power (W)	Description	Number of Led	Light Output (Lm)	Dimensions (mm)	
DFG1	120	Housten Dau 1	48	13150	497-300-100	
DFG2	140	Housten Dau 2	48	14840	497-300-100	
DFG3	150	Housten Dau 3	48	16150	497-300-100	
DFG4	185	Housten Dau 4	48	19650	497-300-100	
DFG5	200	Housten Dau 5	48	21150	497-300-100	

TECHNICAL OPTIONS
Teknik Seçenekler

• Dali
• Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

CE TSE RoHS




ALL AROUND THE WORLD

www.entekled.com.tr

HOUSTEN SQUARE

OUTDOOR LIGHTING » FLOODLIGHT LUMINAIRE





TECHNICAL FEATURES Teknik Özellikler

/		IIK ÖZCIIKICI
Warranty	:	5 Years
Lamp Type	:	Power LED
Housing	:	Aluminium
Glass	:	Tempered Glass
IP	:	66
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	·:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C


Housten series meets a variety of lighting needs across three different applications: architectural, site lighting and signage. A choice of optics makes it an extremely flexible and versatile LED solution, delivers excellent quality of light just where it is required.

Item	Power (W)	Description	Number of Led	Light Output (Lm)	Dimensions (mm)
HFG1	225	Housten Square 1	100	23800	404-345-150
HFG2	250	Housten Square 2	100	26500	404-345-150
HFG3	300	Housten Square 3	100	30450	404-345-150



QUALITY CERTIFICIATE Kalite Sertifikaları

CE TSE RoHS

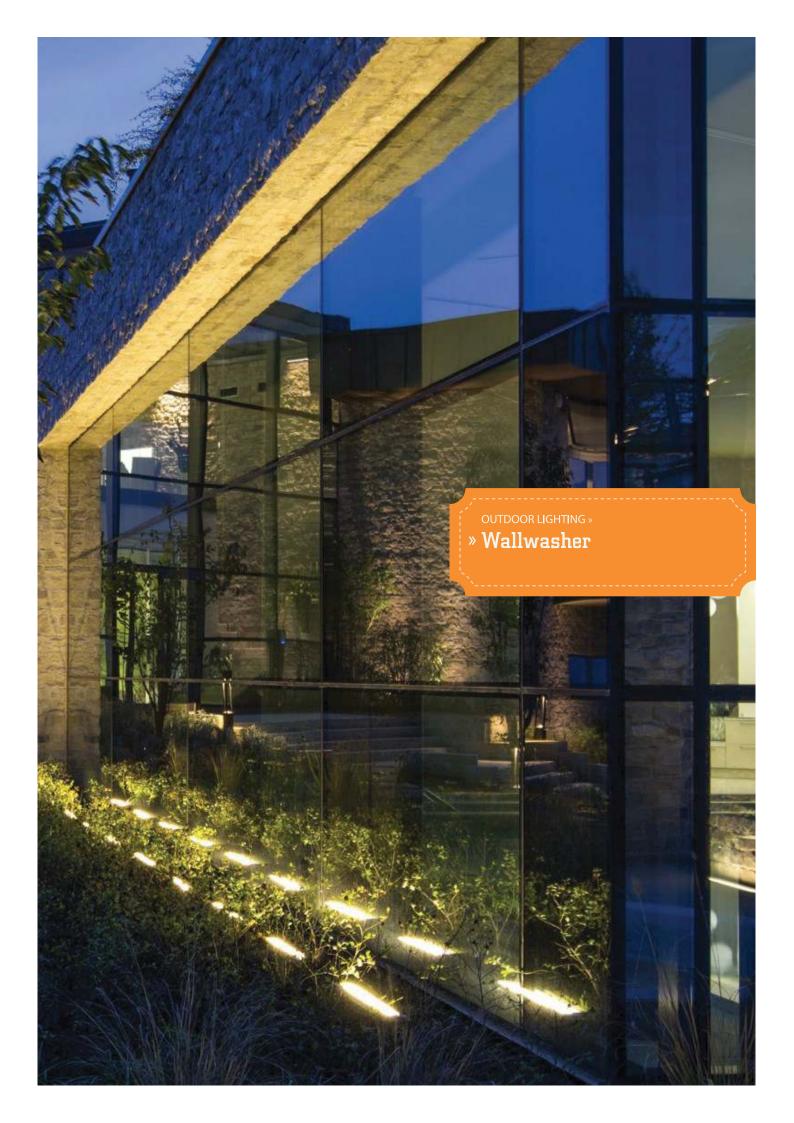







le le	knik Ozellikler
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
IP	: 65
Kelvin	: 3000 - 4000 - 6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Are designed to be multi functional, offering a wide range of lighting solutions and dramatic highlighting effects of architectural facades of buildings. They are suitable for many applications such as residential areas, shopping mall, parks, gardens as well as commercial, historic or modern architectural interiors and exteriors.

TECHNICAL DETAIL Teknik Detaylar


Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
SWWG1	10	Suns Wallwasher 1	720	250-70-55	
SWWG2	20	Suns Wallwasher 2	1520	500-70-55	
SWWG3	30	Suns Wallwasher 3	2400	750-70-55	
SWWG4	40	Suns Wallwasher 4	3210	1000-70-55	


TECHNICAL OPTIONS
Teknik Seçenekler

• Dali • Dimmer • Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları









Installation : Recessed Warranty : 5 Years Lamp Type : LED Housing : Aluminium Glass : Tempered Glass ΙP : 65 Kelvin : 3000 - 4000 - 6000 CRI : >80 Led Lifetime : 50.000 h Power Supply: 110-240V 50-60Hz Op. Temp. : -20°C / +45°C

Suitable for pendanted or surface or recessed mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime. The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAIL Teknik Detaylar


Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
ACG1	60	Arigo Canopy 1	6100	335-335-102	
ACG2	75	Arigo Canopy 2	8250	335-335-102	
ACG3	90	Arigo Canopy 3	9800	335-335-102	

TECHNICAL OPTIONS Teknik Seçenekler

• Dali • Dimmer • Emergency Kit







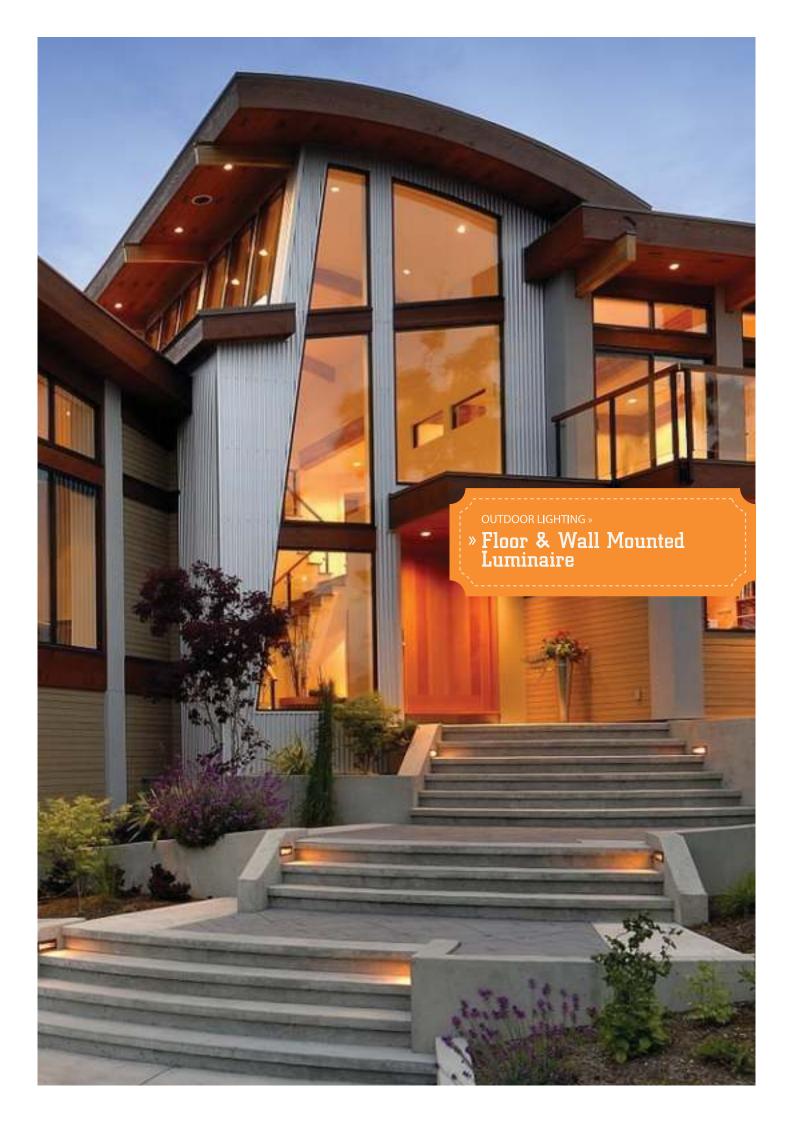









_		
Installation	:	Surface
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	Aluminium
IP	:	66
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

Suitable for surface mounting on ground. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETA Teknik Detayla

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
FUG	2	Flair	98	150-110	



QUALITY CERTIFICIATE Kalite Sertifikaları


C € RoHS



OUTDOOR LIGHTING » FLOOR & WALL MOUNTED LUMINAIR







TECHNICAL FEATURES Teknik Özellikler

/ le	KI	lik Özelliklei
Installation	:	Recessed
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	Aluminium
Glass	:	Glass
IP	:	68
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	:	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

Suitable for recessed mounting underwater. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAIL Teknik Detaylar

Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
BUG1	6	Bell 1	390	100-120	
BUG2	12	Be ll 2	980	140-120	
JZ	12	DEN Z	300	140-120	
_					




QUALITY CERTIFICIATE Kalite Sertifikaları









Installation	:	Recessed
Warranty	:	5 Years
Lamp Type	:	LED
Housing	:	Aluminium
IP	:	54
Kelvin	:	3000 - 4000 - 6000
CRI	:	>80
Led Lifetime	:	50.000 h
Power Supply	<i>'</i> :	110-240V 50-60Hz
Op. Temp.	:	-20°C / +45°C

Suitable for recessed mounting in unventilated or ventilated walls. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime. The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAIL:

TECHNICAL OPTIONS
Teknik Seçenekler

Dali
Dimmer Emergency Kit

QUALITY CERTIFICIATE Kalite Sertifikaları

C€ RoHS



FALSO & APOLLO

OUTDOOR LIGHTING » GARDEN LUMINAIRES





Bollards are perfect for lighting pathways and entryways, providing adequate lighting for increased safety on your property and visually illuminating the pedestrian pathway.



-GG	24	Falso	1800	1000x220x220	
ASG1	36	Apo ll o 1	3500	250x300x350	
ASG2	36	Apollo 2	3500	250x300x400	









TECHNICAL FEATURES Teknik Özellikler					
Installation	:	Surface			
Warranty	:	5 Years			
Lamp Type	:	LED			
Housing	:	Aluminium			
Glass	:	PC			
IP	:	20			
Kelvin	:	3000 - 4000 - 6000			
CRI	:	>80			
Led Lifetime	:	50.000 h			
Power Supply	<i>'</i> :	110-240V 50-60Hz			
Op. Temp.	:	-20°C / +45°C			

Suitable for surface or recessed mounting in unventilated or ventilated ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic

		ellikiei
Installation	: Surf	ace
Warranty	: 5 Ye	ars
Lamp Type	: LED	
Housing	: Alur	ninium
Glass	: PC	
IP	: 20	
Kelvin	: 3000) - 4000 - 6000
CRI	: >80	
Led Lifetime	: 50.0	00 h
Power Supply	: 110-	240V 50-60Hz
Op. Temp.	: -20°	C / +45°C


em	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
G	14	SIRI	1200	1000-18.5-18.5	




~ /		∕ CERTIFICIATE e Sertifikaları	
	(€	RoHS	

FOLLOX

OUTDOOR LIGHTING » LED BAR & LINEER LUMINAIRI







TECHNICAL FEATURES Teknik Özellikler

Te	knik Ozellikler
Installation	: Surface
Warranty	: 5 Years
Lamp Type	: LED
Housing	: Aluminium
Glass	: Glass
IP	: 65
Kelvin	: 3000 - 4000 - 6000
CRI	: >80
Led Lifetime	: 50.000 h
Power Supply	: 110-240V 50-60Hz
Op. Temp.	: -20°C / +45°C

Suitable for surface mounting on ceilings. The luminaire must not be covered with insulation. For further details please contact with us. Light sources are fitted in the luminaire. The luminaire offer energy performance and much longer lifetime.

The Luminaire will be accurate and realistic solution for you.

TECHNICAL DETAIL!


Item	Power (W)	Description	Light Output (Lm)	Dimensions (mm)	
FLX	14	Follox	1200	1000-15-15	



QUALITY CERTIFICIATE Kalite Sertifikaları

C € RoHS



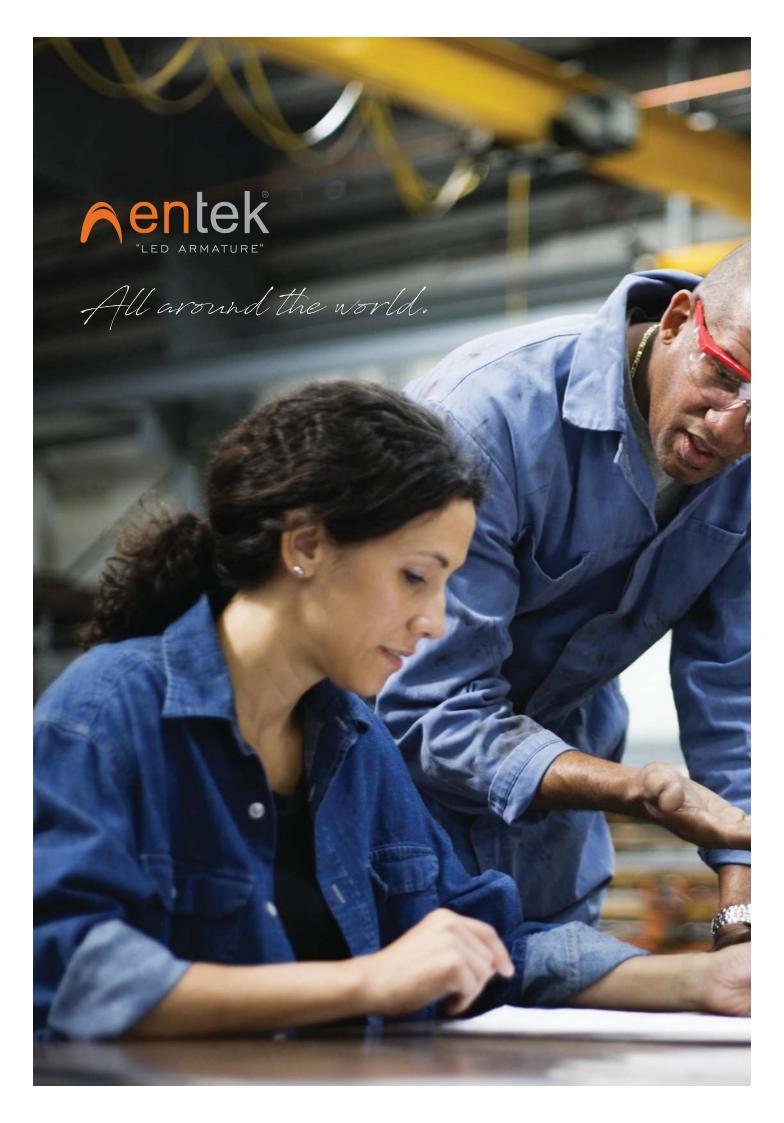








ALL AROUND THE WORLD

www.entekled.com.tr



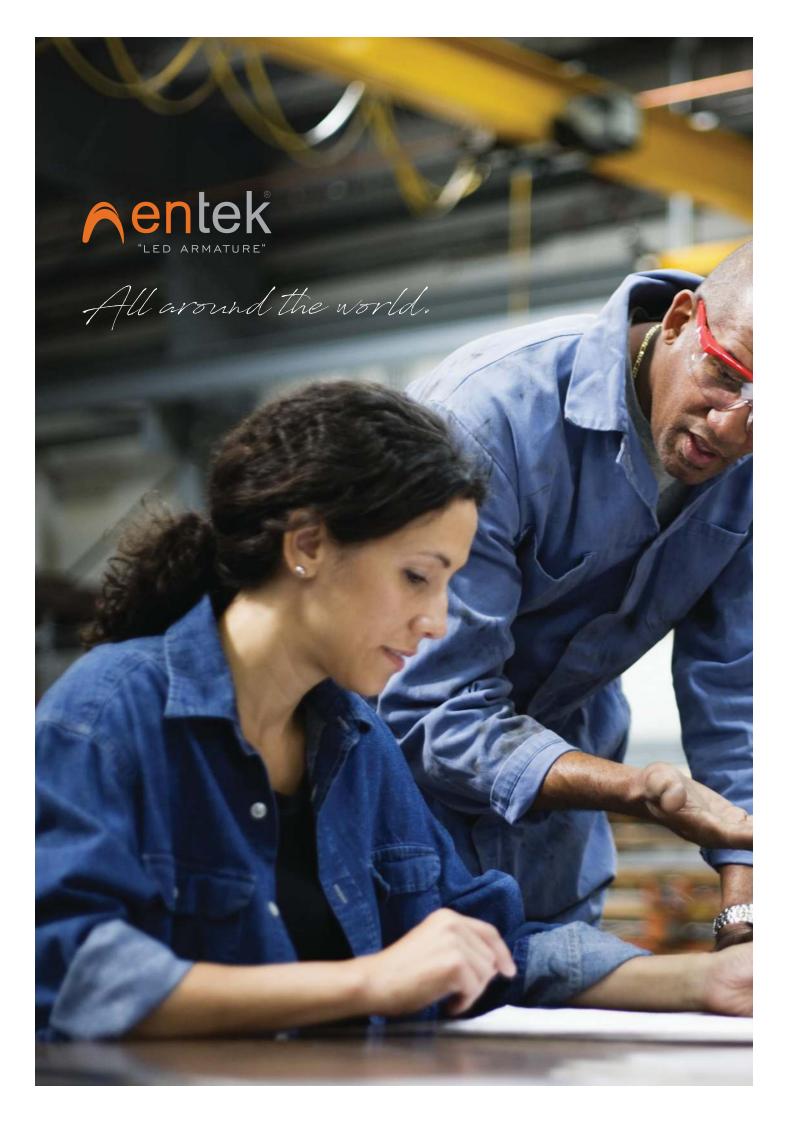



HEAD OFFICE

Ömerli Mh. Özçınar Sk. Kos-Koop San. Sitesi No.18 34555 Hadımköy-Arnavutköy / Istanbul / Türkiye

T.: +90 (212) 798 3041 - 3042 F.: +90 (212) 798 3043

E-mail: info@entekled.com.tr www.entekled.com.tr



SHOW ROOM

Cevizlidere Mahallesi, Ceyhun Atuf Kansu Caddesi No:181 Balgat - Ankara / Turkey

T.: +90 (312) 334 3424



Per the Law of Intellectual Property Rights and related legislative provisions, any article, images, and other visual presentations published in this catalog belong to **Entek LED** None can be excerpted or used without permisson.

Bo katolagda yayımlanan her türlü yazı, resim ve görsellerin tüm hakları FSEK ve ilgili Mevzuat Hükümlerince **Entek LED** firmasına aittir. İzinsiz alınamaz, kullanılamaz.

Copyright © Entek LED Armatür San. ve Tic. A.Ş.